



Universal Docking Stations

with Zero Footprint Mounting Bracket







FAR 8.7 requires that federal customers purchase AbilityOne products appropriate to their needs. Purchases of the commercial equivalents are in violation of federal law and regulations. PB UNIVERSAL DOCKING STATIONS (F240430)





Office Supplies

Universal Docking Station

Description

Universal Docking Stations expand the functionality of all your portable devices, transforming them into a desktop replacement and providing workstation power for your entire setup. Supports work environments with mixed computer brands and operating systems. Zero Footprint Mounting maximizes desktop space and reduces desktop cable clutter. Numerous product desktop ports accommodate a wide variety of connected devices. Supports up to two (2) 2K - 4K 60Hz monitors. Perfect for today's office trends of "Hot Desking", "Hoteling", and "B.O.Y.D." (bring your own device).

Selling Points

- Works with multiple computer brands and operating systems
- Accommodates a wide variety of connected devices
- Supports up to two (2) 2K 4K 60Hz monitors
- Reduces desktop cable clutter
- Perfect for today's mobile office trends



NSN	Description	MOQ	UI	UPC Code
7025-00-NIB-0014	Universal Docking Station - USB-C and USB 3.0 - Dual 2K - Windows and Mac - with Mounting Bracket	1	EA	830951009346
7025-00-NIB-0015	Universal Docking Station - Thunderbolt 3 and USB-C - Dual 4K - Windows and Mac - with Mounting Bracket	1	EA	830951009353

NSN	Commercial Part Numbers		
7025-00-NIB-0014	TBD		
7025-00-NIB-0015	TBD		



Universal Docking Station with Mounting Bracket Thunderbolt 3 and USB-C, Dual 4K, Windows and Mac NSN: 7025-00-NIB-0015

The perfect hybrid dock for maximum productivity and compatibility



At last, the perfect dock for maximum productivity and compatibility has arrived. Innovatively engineered to support mixed computing environments with high transfer speed requirements, the Kensington SD5550T Thunderbolt™ 3 and USB-C Dual 4K Hybrid Docking Station plugs into the power of one − one dock for more power, more bandwidth, and more compatibility.

- True Universal Compatibility Perfect for hot-desking and mixed deployment environments, the SD5550T works with Thunderbolt 3 & USB-C laptops running Windows or macOS.
- Thunderbolt 3 Technology Allows users to transfer up to 40Gbps of data, video and audio (10Gbps for USB-C 3.1 Gen2 laptops and 5Gbps for USB-C 3.1 Gen1 laptops) using the included Thunderbolt 3 cable for a quick and powerful plug and play experience.
- Single or Dual 4K Video Output for Thunderbolt 3 Enabled Devices* – Extend visual productivity with the crisp resolution, contrast and color depth of Ultra HD (Single or Dual 4K 60Hz) via two DisplayPort ports. USB-C laptops must support Alt Mode.
- 60W Power Delivery Quickly and simply charge any Thunderbolt 3 or USB-C enabled laptop, and peripheral USB accessories, using the Thunderbolt 3 connection. USB-C laptops must support Power Delivery.
- Productive Desktop Ports Two USB-C 3.1 Gen2 ports (up to 10Gbps), three USB-A ports (1 Gen2@10Gbps; 2 Gen1@5Gbps), one Gigabit Ethernet port, and one audio combo jack.

*For USB-C Alt Mode devices, a maximum resolution of Single 4K 30Hz or Dual 1080p @ 30Hz is supported (dual monitors are for devices that support MST).



All specifications are subject to change without notice. Products may not be available in all markets. Kensington and the ACCO name and design are registered trademarks of ACCO Brands. Kensington The Professionals' Choice is a trademark of ACCO Brands. All other registered and unregistered trademarks are the property of their respective owners. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries. © 2019 Kensington Computer Products Group, a division of ACCO Brands. All rights reserved. K19_3520






Product Sheet

Universal Docking Station with Mounting Bracket Thunderbolt 3 and USB-C, Dual 4K, Windows and Mac

NSN: 7025-00-NIB-0015



Gigabit Ethernet

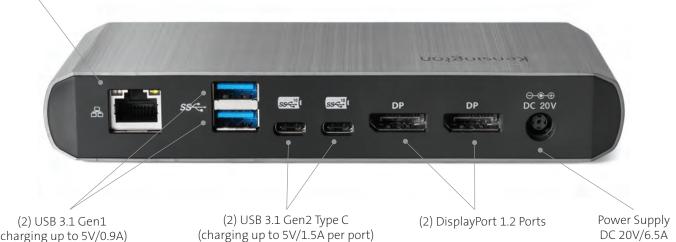

(charging up to 5V/0.9A)



Universal Docking Station with Mounting Bracket Thunderbolt 3 and USB-C, Dual 4K, Windows and Mac

NSN: 7025-00-NIB-0015

	Operating Systems Supported	Windows 10 and macOS 10.14 or later
	Plug & Play	Yes, for Thunderbolt™ 3 and USB-C™ Alt Mode laptops
	System Resource Requirement	N/A
Host Connectivity		
,	Host Docking Connector	Thunderbolt™ 3 or USB-C Alt Mode laptops with Power Delivery up to 60W
Video Connections		
	Video Connectors	(2) DisplayPort 1.2
	HDCP Support	No
	Maximum Resolution Supported	Thunderbolt™ 3 - Single Monitor: 4K@60Hz Thunderbolt™ 3 - Dual Monitors: 4K@60Hz USB-C™ - Single Monitor: 4K@30Hz USB-C™ - Dual Monitors: 1080p@30Hz
Audio Connections		
	Audio Connectors	3.5mm audio for headphone/speaker
	Audio Channels Supported	Stereo LR
USB Connections		
	Front Panel	(1) USB 3.1 Gen2 Port, charging up to 5V/1.5/ (1) Thunderbolt™ 3 and USB-C Alt mode upstream port
	Back Panel	(2) USB 3.1 Gen2 Type C Ports, charging up to 5V/1.5A per port (2) USB 3.1 Gen1 Port, charging up to 5V/0.9
Network Connections		(2) 030 3.1 Gen 1 ort, enarging up to 3 1/0/3/
	Ethernet Port	RJ45
	Compatible Ethernet Speed	10/100/1000 Mbps
Security and Mounting		
	Kensington Security Slot	(1) Standard slot (1) Nano slot
	VESA Mount Compatible	Yes, sold separately VESA Mounting Plate (K33959WW) Docking Station Mounting Bracket (K34050W





170mm (6.69in) 0mm (3.15in) 27mm (1.07in)
(7/11/11)
(21.07 in2); zero if mounted behind npatible monitor
71lbs)
S chassis, Aluminum frame, glass
ox (K38130US); x (K38131NA/EU)
07mm (12.09in) 215mm (8.46in) 255mm (10.04in) 1200g (2.7lbs)
sington SD5500T/SD5550T Dock cable, 0.7m (2.3ft) Power Adapter with US power cable (K38130US/K38131NA); Power Adapter with EU + UK ords included (K38131EU); Power Adapter with AU + JP power luded (K38131AP) art Guide
00-240V; 2.5A max 20V DC; 6.5A, positive center polarity
C (32 to 140° F)
° C (-40 to 158° F)
% non-condensing
RCM, ERP, VCCI, CB, REACH, RoHS, bolt certification
mited worldwide










Universal Docking Station with Mounting Bracket

USB-C and USB 3.0, Dual 2K, Windows and Mac

NSN: 7025-00-NIB-0014

Extending the Life of Your Docking Station Investments



Supporting the latest USB-C connections, and legacy computers with USB 3.0 ports, the SD4700P Universal USB-C and USB 3.0 Dual 2K Docking Station is the ideal docking solution for evolving computer environments. Engineered using the most stable and trusted technology, the SD4700P provides compatibility that just works. Exhaustively tested with new and legacy laptop models, the SD4700P extends the life of your technology investments and is easy and painless to setup.

- Universal Docking Station is a savvy technology investment for evolving and mixed computer environments - conveniently connecting any laptop equipped with USB-C or USB 3.0 and supporting both Windows and Mac
- Simple Set-up allows you to connect and quickly transfer audio, video, data and power (supported USB-C devices with PD function only), keeping your workspace clean and clutter-free, while also easily accommodating roaming computer environments and flexible workspaces
- DisplayPort++/HDMI provides flexible video connections with support up to 2560 x 1600 @ 60Hz for a single monitor or 2048 x 1152 @ 60Hz for dual monitors via DisplayLink



All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. Kensington and the ACCO name and design are registered trademarks of ACCO Brands. Kensington The Professionals' Choice is a trademark of ACCO Brands. All other registered and unregistered trademarks are the property of their respective owners. © 2019 Kensington Computer Products Group, a division of ACCO Brands. All rights reserved. K20_3663






Universal Docking Station with Mounting Bracket USB-C and USB 3.0, Dual 2K, Windows and Mac



Back

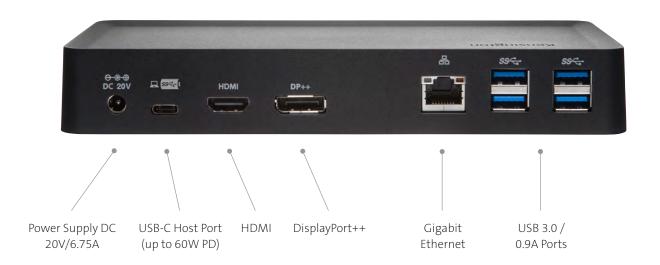





Universal Docking Station with Mounting Bracket USB-C and USB 3.0, Dual 2K, Windows and Mac

NSN: 7025-00-NIB-0014

	Operating Systems Supported	Windows 7 or above, macOS 10.14
ortena De coin	Plug & Play	DisplayLink driver installation required
ystem Requirement		download software from Kensington.com,
		or via Windows update
	System Resource Requirement	N/A
	USB-C Power Delivery	Supports USB-C PD 3.0 5V/9V/12V/20V up to 3A
		60W Maximum
Host Connectivity		
	Host Docking Connector	USB-C
Video Connections		
	Video Connectors	HDMI V1.3
		DisplayPort v1.1 ++ (Passive cables/
		adapters for HDMI or DVI conversion)
	Maximum Resolution Supported	Single Monitor: 2560 x 1600 @ 60Hz
		Dual Monitors: 2048 x 1152 @ 60Hz
	HDCP Support	No
Audio Connections		
	Audio Connectors	One 3.5mm combo audio port for audio in & out
	Audio Channels Supported	Stereo LR
USB Connections		
	All Ports	Support up to 5Gbps transfer rate
	USB 3.0 Ports	Five; (1) front with 5V/2.1A fast-charging and (4) back supporting 5V/0.9A
	USB-C Ports	Two; (1) front with 5V/3A and (1) rear supporting 60W power delivery
Network Connections		
	Ethernet Port	RJ45
	Compatible Ethernet Speeds	10/100/1000 Mbps
Other Features		
	Kensington Security Slot	Yes
	VESA Mount Compatible	Mounting plate (K33959WW) sold separately



Kensington

Depth: 91.2mm (3.6in) Height: 30.5mm (1.2in) Desktop Footprint Desktop Footprint Desktop Footprint Desktop Footprint 1.3kg (39.86oz) Enclosure Color and Material Black PC/AB5 Packaging Style Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) U5 power cord only (K38240NA) Master Carton Master Carton Package Content Package Content Package Content One S04700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with U5 power cable included (K38240NA); One Quick Statinstruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature One 50 to 158° F) Storage Temperature 40 to 70° C (-40 to 158° F) Relative Humidity Storage Temperature 40 to 70° C (-40 to 158° F)		Unit without Peripherals	Width: 200mm (7.9in)
Peckaging Dimensions Packaging Dimensions Packaging Weight Packaging Weight Packaging Weight Packaging Weight Package Content Packaging Mackatina (1.6akg in) Packaging Mackatina (1.6akg in)		ome without rempherals	• • •
VESA compatible monitor Unit Weight 1.13kg (39.86oz) Enclosure Color and Material Black PC/ABS Packaging Dimensions Packaging Style Brown Box (K38240NA) Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SU4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power calle included (K38240NA); One Cuick Sta Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 120 AC: 50/60			•
Enclosure Color and Material Black PC/ABS Packaging Dimensions Packaging Style Brown Box (K38240NA) Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) U5 power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (5R), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with U5 power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compiliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty Warranty 3-Years Limited - worldwide		Desktop Footprint	
Packaging Dimensions Packaging Style Brown Box (K38240NA) Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Station; One USB-C (F) to USB 3.0		Unit Weight	1.13kg (39.86oz)
Packaging Style Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) U5 power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One U58-C to U58 Cable, 1M (3ft), with a tethered U58-C (F) to U58 3.0 (M) adapter; One AC Power Adapter with U5 power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature 40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance CE, FCC, RCM, REACH, ROHS, WEEE Warranty 3-Years Limited - worldwide		Enclosure Color and Material	Black PC/ABS
Unit Box Width: 215mm (8.46in) Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Depth: 230mm (9.06in) Depth: 232mm (9.06in) Depth: 232mm (9.06in) Depth: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance CE, FCC, RCM, REACH, ROHS, WEEE Warranty 3-Years Limited - worldwide	Packaging Dimensions		
Depth: 105mm (4.13in) Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6ibs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature Oto 40° C (32 to 140° F) Storage Temperature 40 to 70° C (-40 to 158° F) Relative Humidity Sw to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance CE, FCC, RCM, REACH, ROHS, WEEE Warranty 3-Years Limited - worldwide		Packaging Style	Brown Box (K38240NA)
Height: 109mm (4.29in) Packaging Weight 1.63kg (3.6lbs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Unit Box	Width: 215mm (8.46in)
Packaging Weight 1.63kg (3.6lbs) US power cord only (K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V Dc; 6.75A AC: 50/60Hz; 1.8A Operating Temperature Oto 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity S% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide			· · · · · · · · · · · · · · · · · · ·
(K38240NA) Master Carton 4 pcs Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.01bs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity Storage Temperature Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide			<u> </u>
Width: 448mm (17.64in) Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity Sw to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Packaging Weight	
Depth: 230mm (9.06in) Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (f) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature Oto 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity Storage Temperature Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance Certifications & Compliance Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide		Master Carton	-
Height: 138mm (5.43in) Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Statinstruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity Sw to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide			, ,
Weight: 4.52kg (10.0lbs) (K38240NA) Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Statinstruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature 40 to 70° C (-40 to 158° F) Relative Humidity S% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide			
Package Content One SD4700P Docking Station; One USB-C to USB Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature Ot o 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity S% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide			_
Cable, 1M (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick Sta Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Paskaga Contant	• • • • • • • • • • • • • • • • • • • •
3.0 (M) adapter; One AC Power Adapter with US power cable included (K38240NA); One Quick State Instruction Guide; Warranty Information Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		rackage Content	
Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide			
Power and Environmental Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance Certifications & Compliance Warranty 3-Years Limited - worldwide			power cable included (K38240NA); One Quick Star
Power Adapter Rating Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide			Instruction Guide; Warranty Information
Output: 20V DC; 6.75A	Power and Environmental		
AC: 50/60Hz; 1.8A Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Power Adapter Rating	Input: 100-240V; 2.5A Max
Operating Temperature 0 to 40° C (32 to 140° F) Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide			Output: 20V DC; 6.75A
Storage Temperature -40 to 70° C (-40 to 158° F) Relative Humidity 5% to 95% non-condensing Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide			AC: 50/60Hz; 1.8A
Relative Humidity 5% to 95% non-condensing Country of Origin, Country of Origin Taiwan Certifications & Compliance Warranty Terms and Certifications & Compliance Certifications & Compliance Warranty Taiwan Certifications & Compliance Second S		Operating Temperature	0 to 40° C (32 to 140° F)
Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Storage Temperature	-40 to 70° C (-40 to 158° F)
Country of Origin Certifications & Compliance Warranty Taiwan CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Relative Humidity	5% to 95% non-condensing
Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide	Country of Origin, Regulatory, and Warranty		
Certifications & Compliance CE, FCC, RCM, REACH, RoHS, WEEE Warranty 3-Years Limited - worldwide		Country of Origin	Taiwan
Warranty 3-Years Limited - worldwide			CE, FCC, RCM, REACH, RoHS, WEEE
TAA Compliant Supports federal government purchasing protoco			3-Years Limited - worldwide
		TAA Compliant	Supports federal government purchasing protoco



